


DC FANS

120 x 120 x 38mm (4.7 x 4.7 x 1.5")


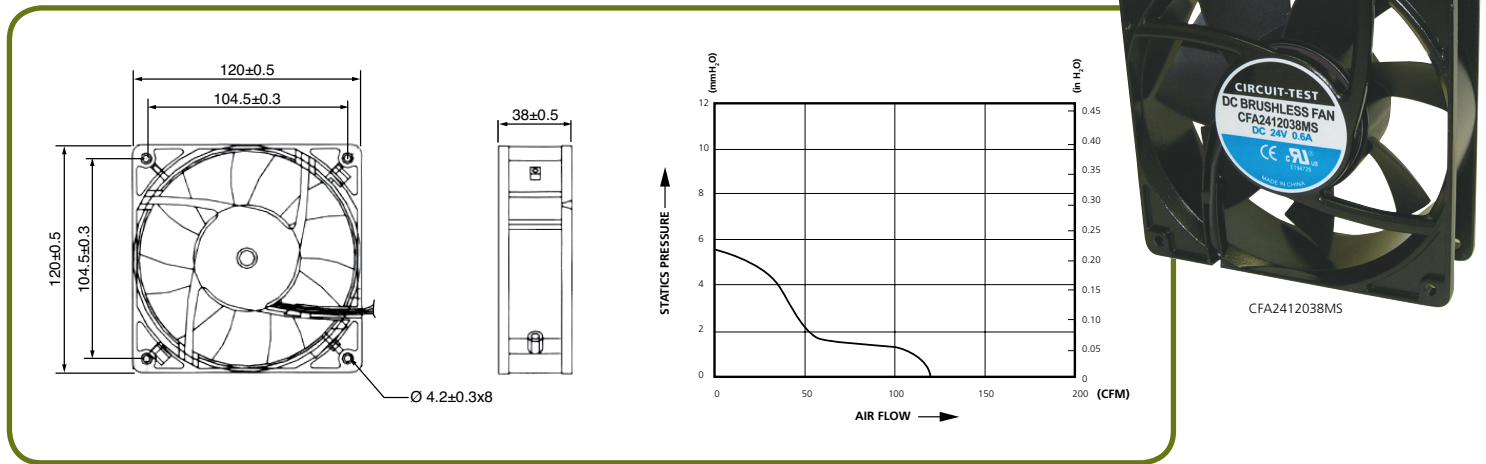


MODEL	RATED VOLTAGE VDC	INPUT POWER W	RATED CURRENT A	BEARINGS	SPEED RPM	AIR FLOW CFM	MAX. PRESSURE mmH ₂ O	NOISE dB	APPROVAL
CFA1212038MB	12	12	1	Ball	2400	121	5.6	46	C US
CFA1212038MS	12	12	1	Sleeve	2400	121	5.6	46	C US
CFA2412038MS	24	14.4	0.6	Sleeve	2400	121	5.6	46	C US

FAN CABLES

AC Fan Power Cords



- Black 18/2 SPT-1 wire
- 105°C 300 volts
- CSA rated 7A/125 VAC
- UL rated 10A/125VAC

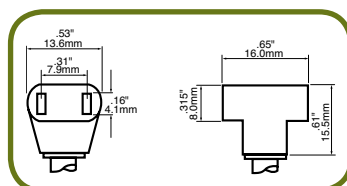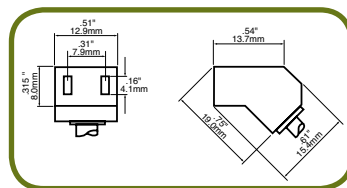

FAN CONNECTOR PLUG TO WIRE LEADS



MODEL	LENGTH	TERMINATION	CONNECTION
CFC-A24	24"	45° Angled Plug	Wire Leads
CFC-T24	24"	'T' style Plug	Wire Leads
CFC-T48	48"	'T' style Plug	Wire Leads
CFC-T72	72"	'T' style Plug	Wire Leads

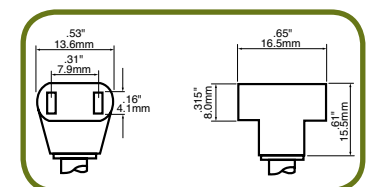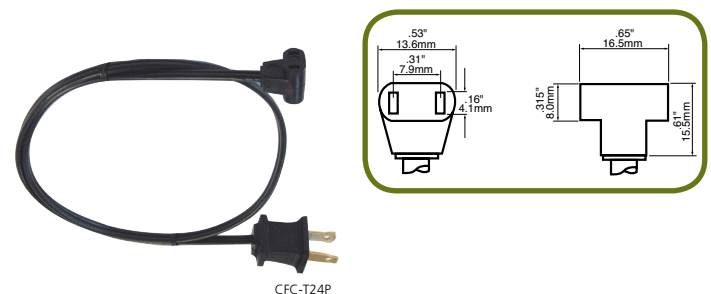

FAN CONNECTOR PLUG TO AC PLUG



MODEL	LENGTH	TERMINATION	CONNECTION
CFC-T24P	24"	'T' style Plug	NEMA 1-15P
CFC-T48P	48"	'T' style Plug	NEMA 1-15P
CFC-T72P	72"	'T' style Plug	NEMA 1-15P