


SOLDERABLE BREADBOARDS

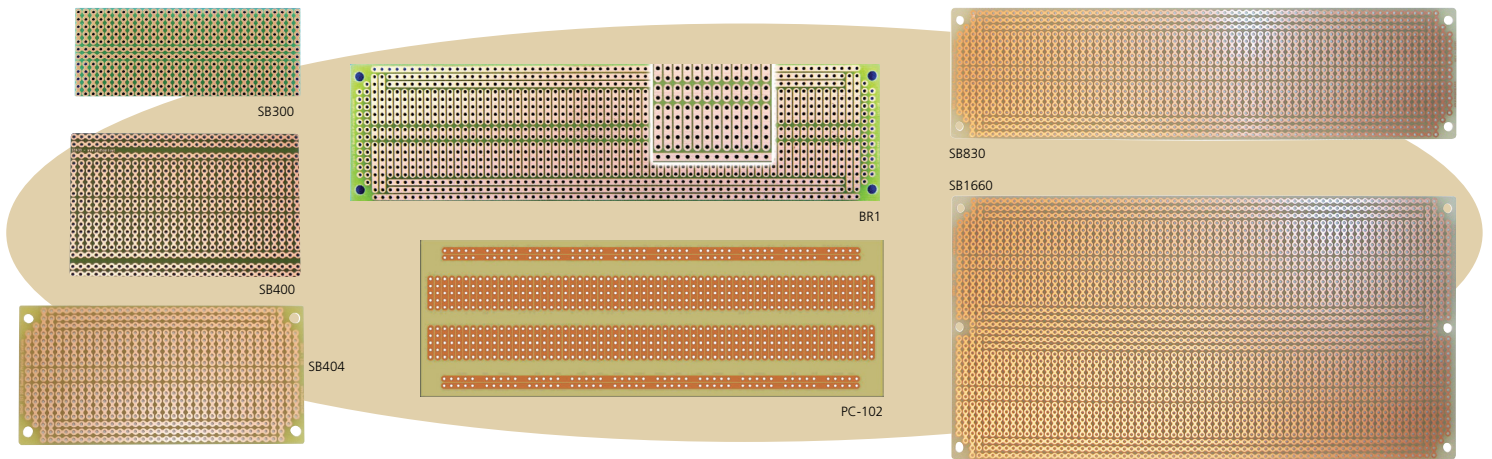

- Single sided copper boards with 0.1" hole spacing
- Top side silkscreen on SB404 & SB830
- 1.6mm (1/16") thickness

Transfer your solderless breadboard circuit to these permanent PC boards and create a rugged long lasting prototype. These are PCB version of various popular breadboards with identical layout.

MODEL	CONTACT POINTS	DIMENSIONS	HOLES	BREADBOARD
SB300	300	31 x 76mm	360	MB-3T-2
SB400	400	47 x 76mm	540	MB-400
SB404	400	47 x 95mm	628	MB-400
BR1	830	47 x 179mm	1226	MB-102
PC-102	830	54 x 166mm	830	MB-102
SB830	830	47 x 184mm	1258	MB-102
SB1660	1660	93 x 184mm	2528	MB-104

PROTO BOARDS FOR HAMMOND ENCLOSURES

- Lead-free etched copper PCBs with an anti-tarnish coating for easy soldering
- High quality FR4 glass-epoxy boards
- 0.042" holes drilled on 0.1" centers

Convenient 2-hole ProtoBoard pattern provides an easy way to connect parts while maximizing useable board space. Designed for HAMMOND 1553 and 1593 ABS plastic enclosures, and 1590 die-cast aluminum enclosures.

MODEL	BOARD DIMENSIONS	HAMMOND BOX SERIES
PR1553B	71 x 108mm	1553B
PR1553DBAT	74 x 139mm	1553D
PR1590B	53 x 103mm	1590B
PR1590BB	81 x 108mm	1590BB
PR1593K	58 x 58mm	1593K
PR1593L	58 x 83mm	1593L
PR1593P	49 x 60mm	1593P
PR1593Q	62 x 69mm	1593Q

