


HEAT SHRINK TUBING - 2:1

2:1

- Flame retardant, flexible polyolefin tubing
- Shrink ratio: 2:1
- Operating temperature: -55°C - 125°C
- Minimum shrink temperature: 70°C

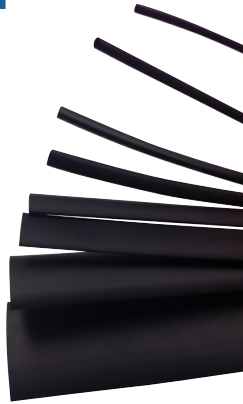

MODEL	DIAMETER	LENGTH	COLOUR	PKG QTY
HS-00210	1/16"	4 ft	Black	10
HS-00310	1/8"	4 ft	Black	10
HS-00510	3/16"	4 ft	Black	10
HS-00610	1/4"	4 ft	Black	10
HS-00910	3/8"	4 ft	Black	10
HS-01210	1/2"	4 ft	Black	10
HS-01804	3/4"	4 ft	Black	4
HS-02504	1"	4 ft	Black	4

HEAT SHRINK TUBING KITS

2:1

- 160 pieces of 4" lengths, Shrink ratio: 2:1
- Flame retardant, flexible polyolefin tubing
- Operating temperature: -55°C - 125°C
- Minimum shrink temperature: 70°C
- Polystyrene storage case included



MODEL	DESCRIPTION
HSK-2100	HeatShrink Kit 2:1, Black, 4" x 160 pcs
HSK-2120	HeatShrink Kit 2:1, Colour, 4" x 160 pcs

3:1

- Dual-wall, adhesive lined, Shrink ratio: 3:1
- 25 pieces, 4" lengths
- Operating temperature: -45°C - 110°C
- Minimum shrink temperature: 80°C
- Includes polystyrene storage case



MODEL	DESCRIPTION
HSK-3100	HeatShrink Kit 3:1, Black, 4" x 25 pcs

WIRE LABELING

Wire Marker Books

- Convenient pocket size booklets for marking cables, terminals, panels, outlets, etc.
- Nylon fabric material, moisture, dirt and oil resistant
- Total 450 markers -10 pages of pre-cut markers each 35mm long

MODEL	DESCRIPTION
AE27	Wire Marker Book: #0-9
AE28	Wire Marker Book: A to Z, #0-15, +,-,/
AE29	Wire Marker Book: #1-45
AE30	Wire Marker Book: #46-90
AE35	Wire Marker Book: #1-15, 16-90, 0, A to Z, +, -, /
AE36	Wire Marker Book: 1,2,3,A,B,C,T1,T2,T3,L1,L2,L3

